


Fiber Optic Distribution Frame 19" 1U Q-Fiber

Description

Fiber Optic Distribution Frame 19" 1U Q-Fiber consists of the box and distribution board. The installation of a drawer (DS) makes it possible to extend the ODF to an extendable version. The embossments on the bottom of the ODF as well as the organisational fans (optionally) make it possible to organise cables and fibre-optic pigtails in an easy, functional and aesthetic way. Replaceable plugs make it possible to install various cable conduits. Movable side holders make it possible to withdraw the ODF by 35 mm from the mounting plane.

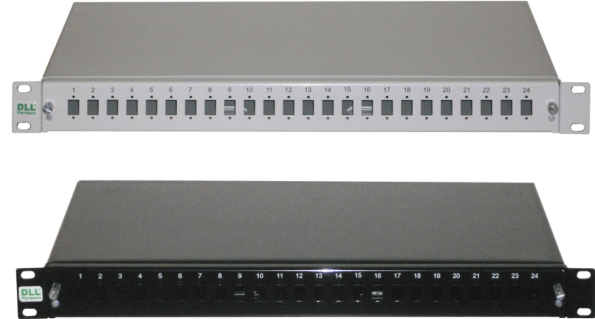



Application

Telecommunication, CATV, Monitoring, Industry, LAN, MAN, WAN, FTTx, PON.

Properties

- » Made of 1.2 mm steel sheet
- » Interchangeable hole plugs allow the installation of various cable glands
- » Embossing to attach cables inside the box
- » Small fans making it possible to organise the tubes or pigtail fibres (optional)
- » Standard color: RAL7035 (light grey) glossy, RAL 9005 (black) glossy, other colors on request
- » Dimensions [H x W x D]: 44x485x230 [mm]
- » Temporary side handles allow the withdrawal of ODF 19" by 35 mm

Photos and dimensions

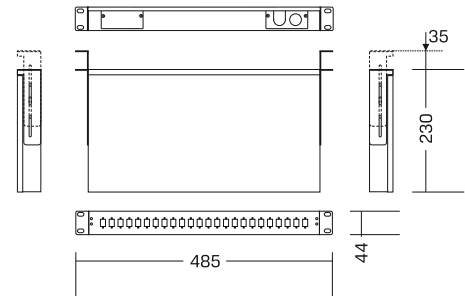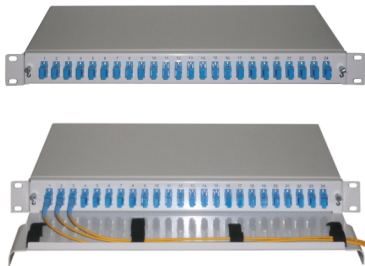

How to order

ODF-19-1U	Fiber optic distribution frame 19" 1U n-draw style
ODF-19-1U-DS	Fiber optic distribution frame 19" 1U draw style
FP191U12ST	19" 1U 12xST/FC/DIN d-hole Panel
FP191U24ST	19" 1U 24xST/FC/DIN d-hole Panel
FP191U12CS	19" 1U 12xSC/E2000 simplex Panel*
FP191U24CS	19" 1U 24xSC/E2000 simplex Panel*
FP191U12CD	19" 1U 12xSC/ST/FC duplex / LC quad Panel
FP191U24CD	19" 1U 24xSC/ST/FC duplex / LC quad Panel

* Suitable for LC/LX.5/MTRJ duplex SC foot print adapters

Information

- » Custom-made hole plugs
- » The ODF houses two cassettes DIN24, three cassettes DIN24 SLIM or four cassettes DIN24 WHITE
- » Product adapted to the FiberQuick system
- » 1U ODF 19" packed in a cardboard box

Standard equipment

- » Cable gland M16x1.5 (cable $\varnothing 5.5 \div \varnothing 10$ mm) (1 pc)
- » Mounting screw M6 (4 pcs)
- » Hole plug 1xZ16+1xO20 (1 pc)
- » Full hole plug (1 pc)

Additional equipment

- » Cable gland M20x1.5 (cable $\varnothing 6 \div \varnothing 13$ mm)
- » Nylon cable tie 80x2.5 mm
- » Small fans organising the optical fibres
- » Pigtails
- » Splice trays
- » Adapters