

# DIN24 Splice Tray Q-Fiber

## Description

**The DIN24 Q-Fiber Splice Tray** is designed to store heat-shrink splice fibers. It is compatible both with splice protector sleeves 45 mm, 60 mm as well as with mechanical casings. DIN24 is used for crossing over cables, patchcords and pigtails. Its small size and a special clamp system make it possible to place DIN24 in most fiber optic distribution frames. The embossing made to attach fiber optic tubes and pigtails inside the Splice Tray enable an easy, functional and aesthetic organization of fibers and pigtails. DIN24 can accommodate up to 24 fiber splices. DIN24 holds up to 24 fiber optic fusion splice protector sleeves or up to 24 easy crimp ANT clamps. The cassette cover is mounted by means of latching discs.




## Application

Telecommunication, CATV, Monitoring, Industry, LAN, MAN, WAN, FTTx, PON.

## Properties

- » Made of 1.2 mm steel sheet
- » Embossing to attach tubes and pigtails
- » The possibility of mounting a splice tray in the ODF 19"
- » Standard color: RAL7035 (light grey) glossy, other colors on request
- » Dimensions [H x W x D]: 13.5x140x117 mm
- » Core capacity: 24

## Photos and dimensions

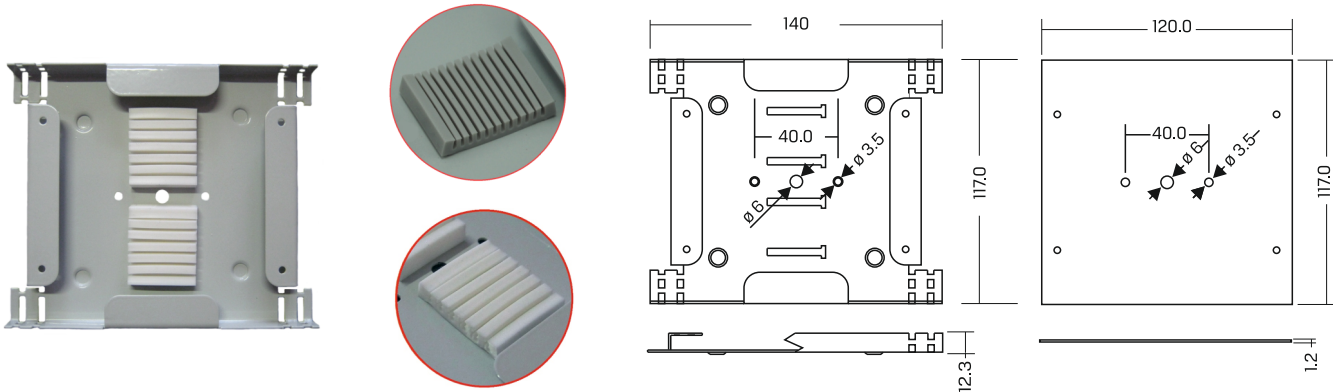

## How to order

DIN24
DIN24 Splice Tray

\*Possibility to order a splice tray with holders for 24 easy crimp ANT clamps

## Standard equipment

- » Cover (1 pc)
- » Latching disc mounting the cover (2 pcs)
- » Screw for fixing the cover (2 pcs)
- » Spacing bolt (2 pcs)
- » Holder for 12 splice protector sleeves or 12 easy crimp ANT clamps (to be chosen) (2 pcs)
- » Sticker: Attention Laser Radiation (1 pc)

## Information

- » The DIN24 holds up to 24 fibre optic fusion splice protector sleeves or up to 24 easy crimp ANT clamps (to be chosen)
- » Cassette designed for housing optic fusion splice protector sleeves 45 mm and 60 mm
- » The possibility of mounting a splice tray in the ODF 19"

## Additional equipment

- » Fibre optic fusion splice protector sleeves
- » Easy Crimp ANT clamps
- » Pigtails
- » Patchcords